




DEWERT

A Phoenix Mecano Company

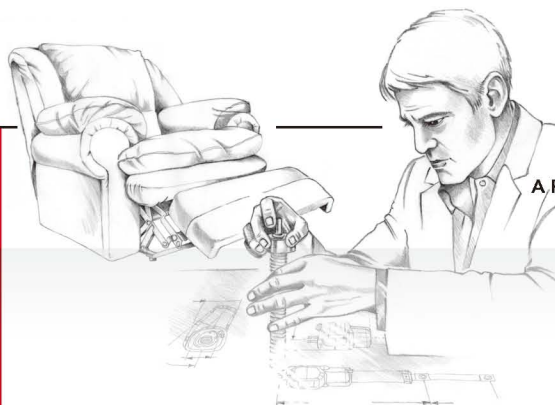

new dynamics




MC 10 • MC 11

Both control units can be mounted directly onto the DS 10 single drive. A wide-range input for the mains voltage allows them to be used world-wide, and they are supplied with a plug-in mains cable. A high and smooth adjustment speed for the connected drives is achieved by means of the constant voltage supply system. The standby power consumption of < 0.5 W meets the international energy-saving guidelines.

Complies with international medical standards, flammability protection UL94 V-0 standard.

Mains cable connection

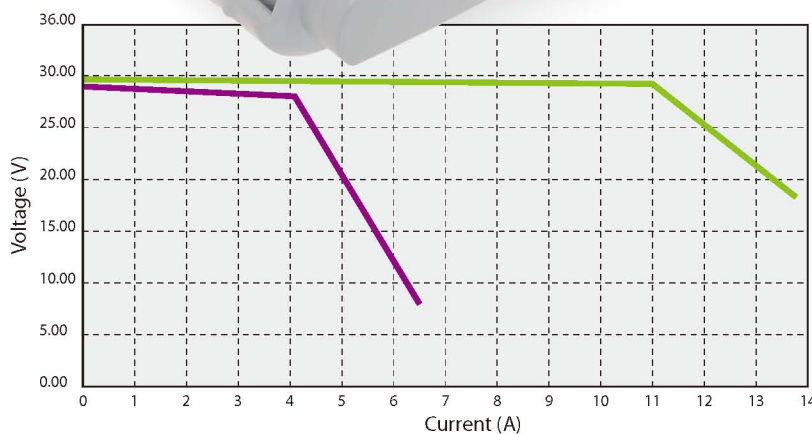

Technical data

Type of control unit	single-fault protected control unit
Protection classification	protection classification II
Protection category	IP 20 (optional IP 54, IP 66)
Power supply	Wide input voltage range 100-240 V AC
Transformer type	Switching mode power supply (SMPS)
Operating mode	intermittent duty 2/18 min. or operating mode 10%
Output voltage	see characteristic curve
Connections for drives	MC 10: 3; MC 11: 4
Connections for operating elements	MC 10: 1; MC 11: 2
Ambient temperature	+ 5 up to + 40 °C
Colours	black, light grey
Mains cable	pluggable mains cable; AUS, EUR, GB, JAP, USA
Assembly options	direct fixing to DS 10